

The undersigned,
Legal representative of the company DEFINITIVE C.L.M. S.r.l. with headquarters in
via Brandoli Ovest 2a/2b 41030 San Prospero (MO), Italia, accordance with the
directive 2006/42/CE (machine directive) and subsequent updates, in his capacity as
constructor, declares that

The Loading Ramp ☐ PAIR ☐ SINGLE

Type	Lenght m
------	----------

☐ (Rubber wheels or Rubber tracks) ☐ (Iron track excavators)

**Charge admissible
(per couple)**

VEHICLES WITH WHELL BASE
1,0 m
VEHICLES WITH WHELL BASE
1,5 m
VEHICLES WITH WHELL BASE
2,0 m
VEHICLES WITH WHELL BASE
2,5 m
SERIAL NUMBER

daN

daN

daN

daN

Complies with all the applicable health and safety regulations.

**AS FAR AS APPLICABLE, REGULATIONS WHEN THE DEVICE
IS IN COMPLIANCE WITH**

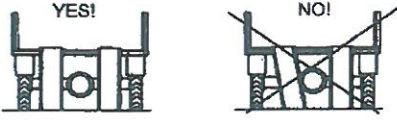
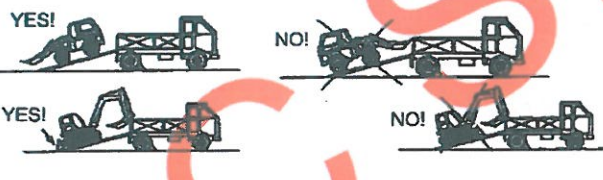

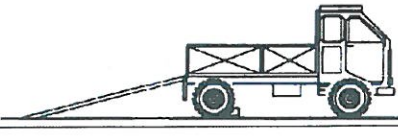
BGR 233:2006	D.Lgs 81/08 e s.m.i.
EN 1999-1-1:2010 + NA:2010-12	

Read carefully the instructions on the back.
Person authorised to fill the technical file:

Legal Representative

Via Brandoli Ovest 2/A 2/B - 41030 San Prospero (MO)

San Prospero (MO),

INSTRUCTIONS ① Before loading, make sure that the wheel base of the vehicle, the weight of the vehicle and its distribution on the axes are within the limits allowed. 	② Avoid propping up the ramps with shims of various type in order to increase their capacity. DANGER OF UNHOOKING 
③ Check the vehicle track and adjust the ramps accordingly: check that the ramps are parallel with each other. 	④ The vehicle onto which loading is made must be idle with wheels locked, handbrake engaged, motor switched off, without starting key in the switchboard and with body in horizontal position. 
⑤ The ramps must be tightly laid and fixed on the lorry structure, check that the hooking is actually made before using the ramps.	
	⑥ Use the ramps keeping in mind the distribution of the weights on the axes: the heavier axis must always be the higher one. If a stabilizing device is used, this must be kept on the lower side.
⑦ Shovels or similar tools, if any, must always be emptied before loading, even if the total weight is less than allowed. ⑧ Maximum speed on the ramps: 2m/min. Avoid abrupt brakings and departures.	⑨ DO NOT USE THE RAMP AS A GANGWAY. 
⑩ Make sure that the ramp gradient during use complies with what is mentioned in the sticker. 	⑪ When loading is accomplished, the ramps must be unhooked and laid on the ground. Care should be taken in order to avoid letting them fall on body parts, equipment or electric cables. ⑫ Ramps heavier than 30 Kg. should be moved by more than one person or by using hoisting equipment.
WARNING INSPECT THE RAMP FROM TIME TO TIME IN ORDER TO DETECT ANY POSSIBLE CRACKS OR FISSURES.	